




Milano

green hides®

Milano

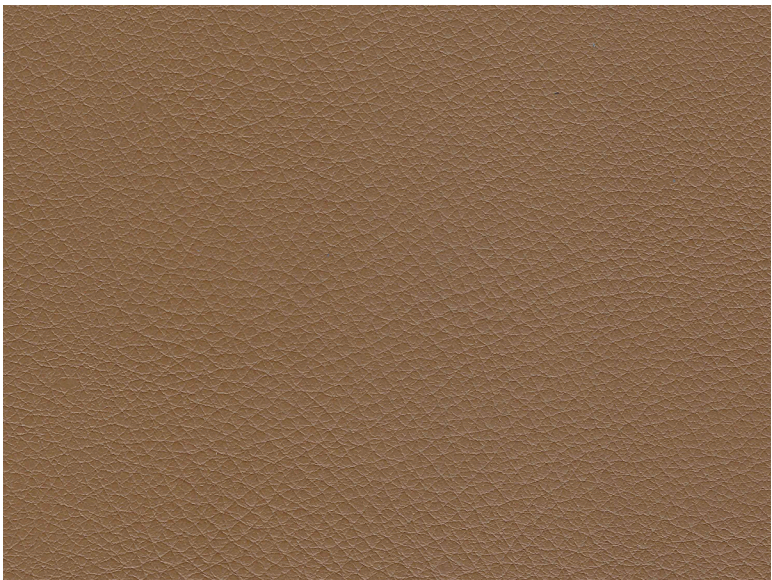


10103
DRIFTWOOD



20220
HARVEST



20520
RUGGINE




20300
VINO




20340
CHESTNUT




20500
SENAPE



20440
SALVIA



20360
CASTANO




20380
COFFEE



10101
PEARL




20120
CREMA




20160
CHAI




20610
TAUPE




20420
ALPINE



20740
CAYMAN



20400
ALGA



20710
NAUTICAL



20100
BONE




20640
CHINO




20660
FUNGO



20430
FRESCO



20860
STONE



20900
BLACK

Milano

Milano is a robust leather featuring a natural grain, soft and rich round hand enhanced by a semitransparent finish exhibiting the natural colorations within the hide. Natural grain variations are expected and projects the unique character of each hide. Innovative and elegant Milano offers luxury and performance suitable for contract, hospitality, and residential environments.

REACH (EC 1907/2006) compliant production aims to improve the protection of human and environmental health. Processed using low emission mineral tanning formulas which are environmentally respectful, the hides are retanned in aged oak drums using vegetable agents, natural fat liquors, oils and dyes that ensure the leather is properly through dyed. Natural color variations may occur even within the same dye lot.

Applications: Contract, Hospitality, Residential

Raw Material: European

Hide Size: Average 48 sqft

Thickness: 1.3 mm

Wet Rub Test: (Nr 150): IUF 450 / UNI EN ISO 11640: ≥ 4 grey scale

Dry Rub Test: (Nr 500): IUF 450 / UNI EN ISO 11640: ≥ 4 grey scale

Abrasion: Wyzenbeek (ASTM D4157) 100,000 Rubs

Abrasion: (ASTM D 3884-22) CS-10 wheels / 500 gram load: 3,000 cycles

Adhesion: IUF 470 / UNI EN ISO 11644: ≥ 3.50 N/cm

Alkaline ph 8: (Nr 80): IUF 450 / UNI EN ISO 11640: ≥ 4 grey scale

Flexing Endurance: IUP 20 / UNI EN ISO 5402: $\geq 30,000$

Tear Strength: IUP 40 / UNI EN ISO 3377-I: ≥ 20 N

Water Repellency: AATCC 22-2017: 95

Light Resistance (Xenon Test): IUF 402 / UNI EN ISO105-B02: 5 blue scale

Flammability Resistance: UFAC Class 1, CAL TB 117-2013, NFPA 260, BS 5852 1991 Sec. 4 NI / 0-1

Origin: Italy

greenhides.com

T: 336.315.9720 F: 336.315.9738



UNI EN ISO 9001:2015



SISTEMA DI GESTIONE
QUALITÀ CERTIFICATO